



FABRICATING MACHINERY
WELDING SOLUTIONS

BENDMAK
BENDING & DRILLING & WELDING SOLUTIONS

www.bendmak.com.tr


B-SAR



OPTIONAL ACCESSORIES

- Custom wheel designs for areas that require high temperature
- Support group which prevents axial movement of the parts
- Earthing Brush System
- Carriage System for Transport
- Synchronous operation with column & boom systems
- Compliance to Atex Certificate

SELF ALIGN ROTATORS

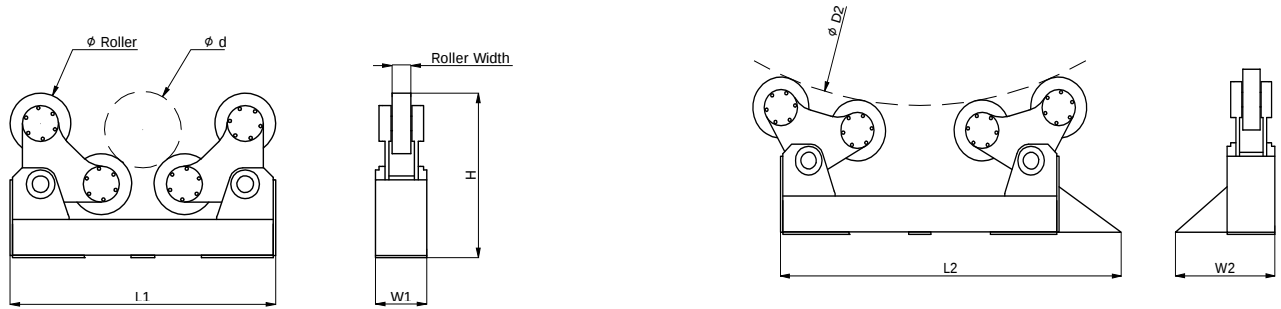

B-SAR TECHNICAL INFORMATION

S.N.	MODEL	Load Capacity (lbs.)	Load Capacity per units (lbs.)	Minimum Diameter (inch)	Maximum Diameter (inch)	Roller Diameter (inch)	Roller Width (inch)	Roller Material	Overall Length Idler (inch)	Overall Width Idler (inch)	Overall Length Drive (inch)	Overall Width Drive (inch)	Height Over Rollers (inch)	Motor Power (HP)
				d	D2	Ø			L1	W1	L2	W2	H	
1	B-SAR - 3	6.600	3.300	9,25	96,46	10	3,0	Polyurethane	40,94	17,32	52,76	22,44	20,28	1 x 0,5
2	B-SAR - 5	11.000	5.500	15,75	118,11	10	3,0	Polyurethane	46,46	18,31	58,27	20,87	20,28	1 x 0,5
3	B-SAR - 10	22.000	11.000	17,72	181,10	15	4,0	Polyurethane	79,13	22,83	98,43	28,74	36,61	2 x 0,33
4	B-SAR - 20	44.000	22.000	17,72	181,10	15	5,0	Polyurethane	79,53	25,98	102,36	31,50	37,40	2 x 0,74
5	B-SAR - 30	66.000	33.000	17,72	204,72	18	5,0	Polyurethane	82,68	26,38	122,05	35,43	39,76	2 x 1
6	B-SAR - 40	88.000	44.000	17,72	204,72	18	5,0	Polyurethane	83,46	26,77	125,98	35,43	41,34	2 x 1,5
7	B-SAR - 50	110.000	55.000	17,72	204,72	18	6,0	Polyurethane	83,46	27,76	125,98	36,42	41,34	2 x 1,5
8	B-SAR - 60	132.000	66.000	19,69	216,54	22	5,0	Polyurethane	102,76	27,76	147,64	39,37	51,57	2 x 1,5
9	B-SAR - 80	176.000	88.000	19,69	216,54	22	7,0	Polyurethane	102,76	33,46	147,64	47,24	51,57	2 x 2,0
10	B-SAR - 100 *	220.000	110.000	23,62	236,22	22	10,2	Polyurethane	114,17	35,43	173,23	49,21	51,97	2 x 3,0
11	B-SAR - 150 *	330.000	165.000	23,62	236,22	22	12,2	Polyurethane	118,90	47,24	177,17	64,96	54,53	1 x 7,4
12	B-SAR - 200 *	440.000	220.000	39,37	275,59	22	14,2	Polyurethane	129,92	49,21	190,94	66,93	55,71	2 x 10
13	B-SAR - 300 *	660.000	330.000	39,37	275,59	22	8,0	Steel	129,92	41,34	194,88	61,02	55,71	2 x 10

* Steel or PU Roller version optional